

## QC4-FHCB-RG142-1

### 4.3-10 Female, Bulk Head, Crimp

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics


#### Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Voltage Withstand:	1500V DC
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω

#### Mechanical

RF Connector:	4.3-10 female
Mating Cable:	RG142
Outer Conductor:	Nickel plated brass
Inner Conductor:	Gold plated phosphor copper or Gold plated brass
Dielectric:	PTFE
Gasket:	Silicone rubber

#### Outline Drawings

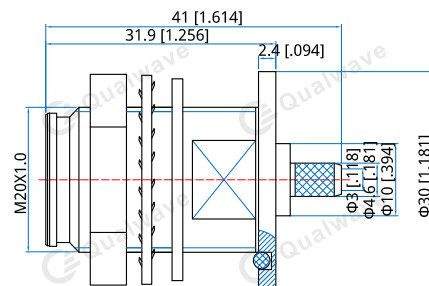

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QC4-FHCB-RG142-1**

Customization is available upon request.