

# QCK-MG-A400-1

## 2.92mm Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC ~ 40GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

### Mechanical


RF Connector:	2.92mm Male
Mating Cable:	QA400
Body:	303F stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium

### How To Order

#### QCK-MG-A400-1

Customization is available upon request.

### Outline Drawings

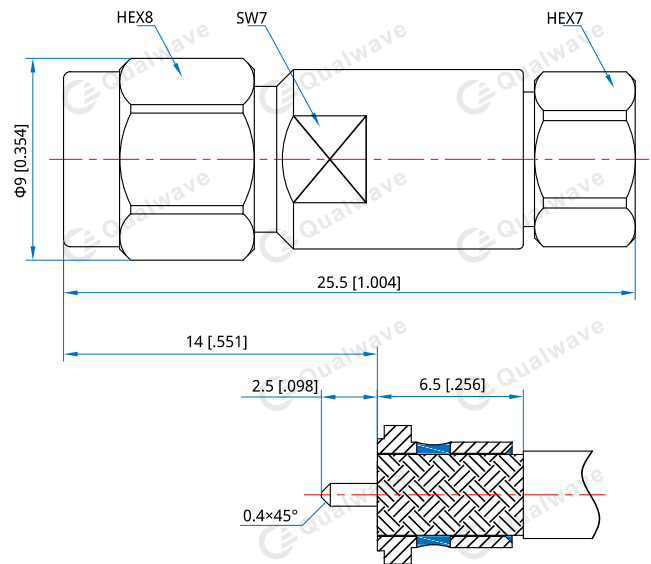

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]