

QCK-MG-A500-1

2.92mm Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical



RF Connector: 2.92mm male
Mating Cable: QA480, QA500, QG500
Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated beryllium copper

How To Order

QCK-MG-A500-1

Customization is available upon request.

Outline Drawings

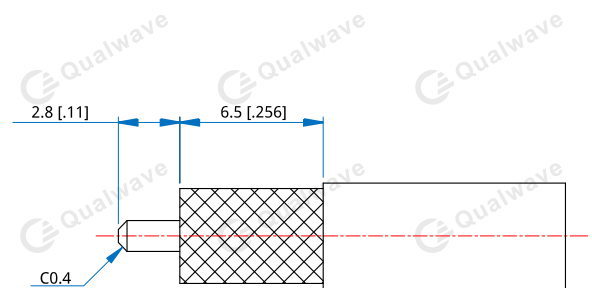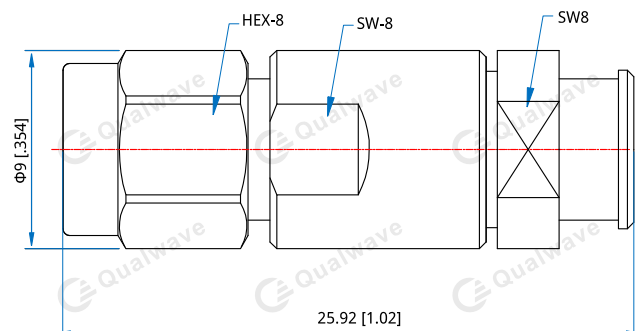

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]