

QCN-FG-G800-1

N Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

| | |
|--------------------------|--------------|
| Frequency: | DC~18GHz |
| VSWR: | 1.3 max. |
| Impedance of Dielectric: | 5000MΩ min. |
| Voltage Withstand: | 1000V DC min |
| Impedance: | 50Ω |

Mechanical


| | |
|------------------|------------------------------|
| RF Connector: | N Female |
| Mating Cable: | QG800 |
| Outer Conductor: | Passivated Stainless Steel |
| Dielectric: | PEI |
| Inner Conductor: | Gold plated beryllium copper |

How To Order

QCN-FG-G800-1

Customization is available upon request.

Outline Drawings

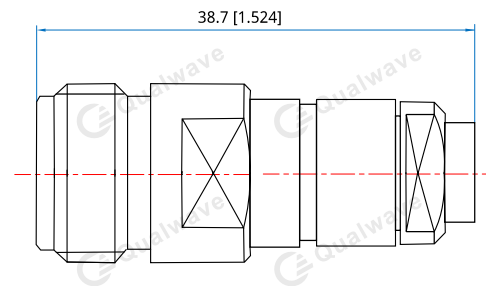

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]