

QCN-MG-A360-1

N Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

Mechanical


RF Connector:	N Male
Mating Cable:	QA360
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

How To Order

[QCN-MG-A830-1](#)

Customization is available upon request.


Outline Drawings

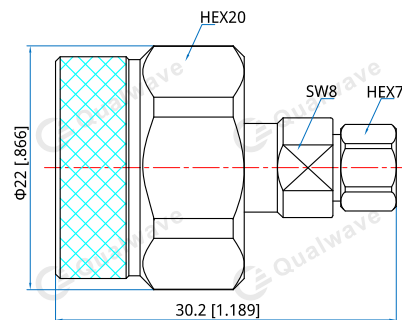

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Stripping Reference



Unit: mm [in]

Tolerance: $\pm 0.1\text{mm}$ [$\pm 0.004\text{in}$]