

QCN-MG-A500-4

N Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connector: N male
Mating Cable: QA500
Outer Conductor: Passivated Stainless Steel
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -40~+165°C


Outline Drawings

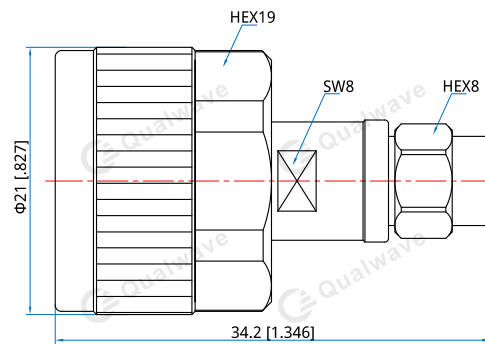

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Stripping Reference

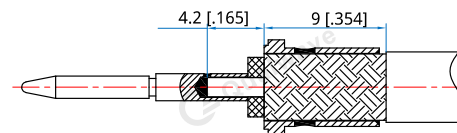

Unit: mm [in]

How To Order

QCN-MG-A500-4

Customization is available upon request.