

QCN-MG-A830-1

N Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	2000V DC
Impedance:	50Ω

Mechanical


RF Connector:	N male
Mating Cable:	QA830
Outer Conductor:	303F stainless steel

How To Order

QCN-MG-A830-1

Customization is available upon request.


Outline Drawings

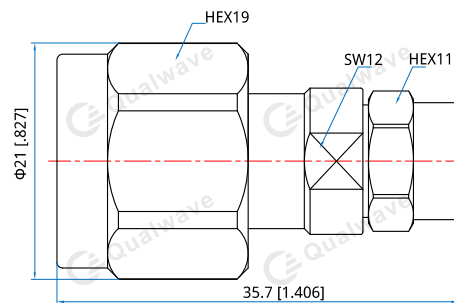

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Stripping Reference



Unit: mm [in]

Tolerance: $\pm 0.1\text{mm}$ [$\pm 0.004\text{in}$]