

# QCS-MCB-R1500-1

## SMA Male, Crimp

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Voltage Withstand:	1000V DC
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω


### Mechanical

RF Connector:	SMA male
Mating Cable:	QR1500
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Inner Conductor:	Gold plated brass
Dielectric:	PTFE

### Environmental

Operating Temperature:	-55~+165°C
------------------------	------------

### Outline Drawings

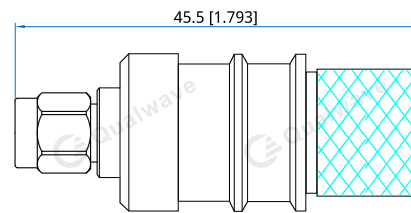

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QCS-MCB-R1500-1**

Customization is available upon request.