

## QCS-MCB-RG316D-1

### SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics


#### Electrical

Frequency:	DC ~ 6GHz
VSWR:	1.25 max.
Impedance of Dielectric:	1000MΩ min.
Voltage Withstand:	1000V
Impedance:	50Ω

#### Mechanical

RF Connector:	SMA Male
Mating Cable:	RG316D
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

#### Outline Drawings

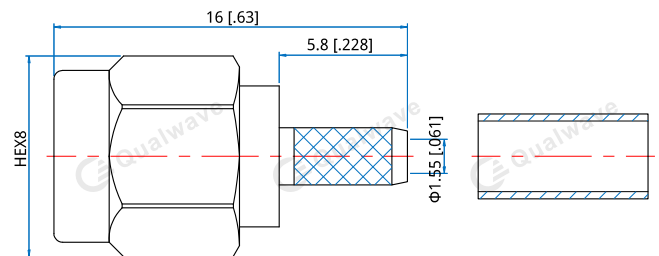

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

#### How To Order

[QCS-MCB-RG316D-1](#)

Customization is available upon request.