

# QCS-MG-A830-1

## SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



### Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

### Mechanical


RF Connector:	SMA Male
Mating Cable:	QA830
Outer Conductor:	303F stainless steel

### How To Order

**QCS-MG-A830-1**


Customization is available upon request.

### Outline Drawings

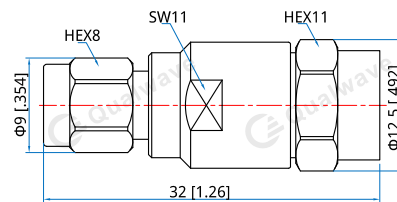

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### Stripping Reference



Unit: mm [in]  
Tolerance: ±0.1mm [±0.004in]