

# QCT-MCB-R1000-1

## TNC Male, Crimp

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency: DC~4GHz  
VSWR: 1.2 max. DC~3GHz  
Impedance: 50Ω


### Mechanical

RF Connector: TNC male  
Mating Cable: QR1000  
Outer Conductor: Ternary alloy plated brass & Nickel plated brass  
Inner Conductor: Gold plated phosphor bronze  
Dielectric: PTFE

### Environmental

Temperature: -45~+125°C

### Outline Drawings

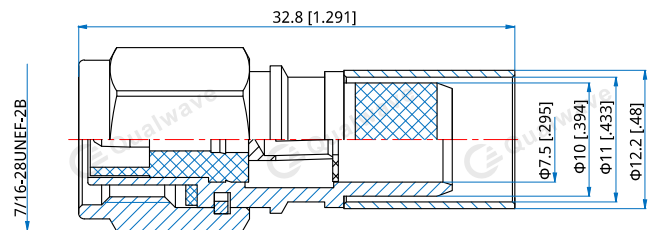

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

### How To Order

**QCT-MCB-R1000-1**

Customization is available upon request.