

## QAM1-22-P

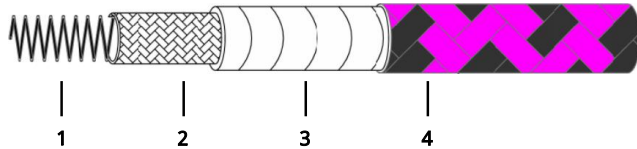
### Long Flex Life

**Features:**

- \* Long Flex Life
- \* High Durable

**Applications:**

- \* Laboratory Test
- \* Satellite Communication

**Construction**


No.	Name	Size (mm)	Material
1	Spring	3.0±0.1	Stainless Steel Strap
2	Outer Conductor	3.35±0.1	Tin Plated Braid
3	Inner Jacket	3.6±0.1	PTFE
4	Jacket	4.7±0.15	PTFE

**Environmental**

Temperature:	-40~+80°C
Water Proof:	No
Oil Proof:	No

**Mechanical**

Bend Radius (installation):	30mm
Bend Radius (repeated):	80mm
Spring Spiral Direction:	Right
Spring Zero Load Pitch:	1.0~1.5mm
Spring Wire Size:	1.5±0.15*0.4±0.01mm
Spring Inner Diameter:	2.20±0.1mm
Outer Conductor Coverage Rate:	90% min.
Inner Jacket Color:	White
Jacket Color:	Purple and Black

**How To Order**
**QAM0-22-P-X**

X: Length in meters

**Examples:**

To order a QAM1-22-P RF cable armor, 0.5 meter, specify QAM1-22-P-0.5.