

QD141

Hand Formable

Features:

- * Hand formable
- * Quick and easy assembly

Applications:

- * Instrumentation
- * Laboratory test
- * Interconnection

Electrical

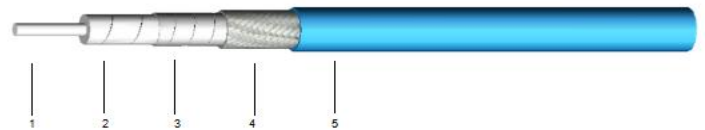
Frequency:	DC~18GHz
Capacitance:	98pF/m
Impedance:	50Ω
VSWR:	1.25max.
Velocity of Propagation:	70%
Shielding Effectiveness:	90dB min.
Voltage Withstand:	3000V DC
Time Delay:	4.7ns/m

Mechanical

Bend Radius Static:	20mm
Weight:	50g/m

Environmental

Temperature:	-55~+150°C
--------------	------------

Construction


No.	Name	Size (mm)	Material
1	Inner Conductor	0.92	Silver-plated copper
2	Dielectric	2.99	PTFE
3	Outer Conductor	3.19	Spiral wrapped silver plated copper bridging
4	Outer Shield	3.55	Silver-plated copper wire braiding
5	Jacket	4.15	TPU(blue)

Attenuation & Power Handling

Frequency (GHz)	0.5	1	2	3	5	6	10	18	20	26.5
Attenuation*1 (dB/100m)	2.1	4.1	8.2	12.2	20.1	24.1	40	71.7	79.6	105.4
Average Power*2 (W)	790	526	351	277	205	185	137	97	88	70

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) = $0.006427 * \sqrt{F} \text{ (MHz)} + 0.003937 * F \text{ (MHz)}$

Calculate Connector Attenuation: Attenuation (dB) = $0.03 * \sqrt{F} \text{ (GHz)}$

How To Order
QD141-X-Y-Z

X: Frequency in GHz

Y: Connector type

Z: Length in meters

Examples:

To order a QD141 cable assembly, DC-18GHz, SMA male to SMA female, 0.5 meter, specify QD141-18-SSF-0.5.

Connector naming rules:

3 - 3.5mm (6GHz, VSWR 1.2)

P - SMP (6GHz, VSWR 1.2)

A - SSMA (6GHz, VSWR 1.2)

S - SMA (6GHz, VSWR 1.2)

N - N (6GHz, VSWR 1.2)

X - MMCX (6GHz, VSWR 1.3)

M - MCX (6GHz, VSWR 1.3)

B - BNC (4GHz, VSWR 1.25)

D - SMB (4GHz, VSWR 1.25)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)

Mating Connector

QCK-MG-141-1

2.92mm male, Stainless steel


QCS-MG-141-3

SMA male, Stainless steel


QCS-MRB-141-4

SMA male, Right angle, Gold plated brass

QCS-MRG-141-3

SMA male, Right angle, Stainless steel

QCS-FB-141-1

SMA female, Gold plated brass


QCS-FL2B-141-1

SMA female, 2 - hole flange mount, Brass

QCS-FL4B-141-1

SMA female, 4- hole flange mount, Gold plated brass


QCS-FHB-141-1

SMA female, Bulk head, Brass

QCN-MB-141-3

N male, Nickel plated brass


QCN-MRB-141-1

N male, Right angle, Nickel plated brass


QCN-MRB-141-2

N male, Right angle, Gold plated brass


QCN-FB-141-1

N female, Nickel plated brass


QCB-MB-141-1

BNC male, Ternary alloy plated brass

