

RG316

Low Cost

Features:
* Low Cost

Applications:
* Telecom
* Interconnect between equipment


Electrical

Frequency:	DC-6GHz
Impedance:	50Ω
Velocity of Propagation:	70%
Voltage Withstand:	600V DC
Capacitance:	96pF/m

Environmental

Temperature:	-55~+200°C
--------------	------------

Construction

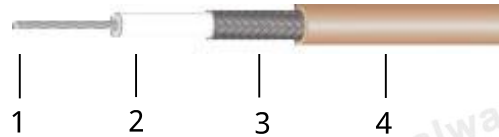

No.	Name	Size (mm)	Material
1	Inner Conductor	0.51	Stranded Silver-plated copper
2	Dielectric	1.5	FEP
3	Outer Shield	1.95	Silver-plated copper braid
4	Jacket	2.5	FEP

Attenuation

Frequency (GHz)	0.1	0.4	1	3	6
Attenuation*1 (dB/100m)	26.2	53.2	85.6	153.2	295

[1] VSWR:1.0; Ambient: +25°C (77°F)

Calculate Cable Attenuation: Attenuation (dB/100m) = $2.583794 * \sqrt{F}$ (MHz) + $0.003893 * F$ (MHz)

Calculate Connector Attenuation: Attenuation (dB) = $0.03 * \sqrt{F}$ (GHz)

How To Order

RG316-X-Y-Z

X: Frequency in GHz

Y: Connector type

Z: Length in meters

Examples:

To order a RG316 cable assembly, DC-3GHz, SMA male to SMA female, 0.8 meter, specify RG316-3-SSF-0.8.

Connector naming rules:

S - SMA (6GHz, VSWR 1.4)

X - MMCX (6GHz, VSWR 1.4)

M - MCX (6GHz, VSWR 1.4)

B - BNC (4GHz, VSWR 2)

D - SMB (4GHz, VSWR 1.4)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)

Mating Connector

QCG-FB-086-1

SSMP female, Beryllium copper



QCG-FRB-086-2

SSMP female, Right angle, Beryllium copper



QCK-MG-086-3

2.92mm male, Stainless steel




QCK-FB-086-1

2.92mm female, Brass



QCK-FL2G-A220-1

2.92mm female, 2-hole flange mount, Stainless steel



QCK-FL4G-A220-1

2.92mm female, 4-hole flange mount, Stainless steel



QCP-FB-086-3

SMP female, Beryllium copper



QCP-FRB-086-1

SMP female right angle, Beryllium copper



QCP-FRB-086-2

SMP female right angle, Beryllium copper



QCA-MG-086-2

SSMA male, Stainless steel



QCA-FHB-086-1

SSMA female bulk head, Brass



QCS-FL2B-086-1

SMA female, 2-hole flange mount, Brass

QCS-FL4B-086-1

SMA female, 4-hole flange mount, Gold plated beryllium copper

QCS-FHB-086-2

SMA female bulk head, Gold plated brass



QCN-MB-086-1

N male, Nickel plated brass



QCN-FB-086-1

N female, Nickel plated brass



QCX-MB-086-1

MMCX male, Gold plated brass



QCX-MRB-086-1

MMCX male right angle, Gold plated brass



QCX-FB-086-1

MMCX female, Gold plated brass



QCM-MB-086-1

MCX male, Gold plated brass



QCM-MRB-086-2

MCX male right angle, Gold plated brass/beryllium copper



QCM-FB-086-1

MCX female, Gold plated brass



QCS-MB-086-4

SMA male, Gold plated
brass

**QCB-MB-086-1**

BNC male, Ternary alloy
plated brass

**QCS-MG-086-3**

SMA male, Stainless steel

**QCD-MB-086-1**

SMB male, Gold plated
brass

QCS-MRG-086-1

SMA male right angle,
Stainless steel

**QCD-MRB-086-1**

SMB male right angle, Gold
plated brass

QCS-MRB-086-1

SMA male right angle, Gold
plated brass

**QCD-FB-086-1**

SMB female, Gold plated
brass

QCS-FB-086-2

SMA female, Gold plated
brass

**QCD-FRB-086-1**

SMB female right angle,
Gold plated brass