


# QA2J

## 2.4mm to 7.0mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar



### Electrical

Frequency: DC~18GHz  
VSWR: 1.25 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: 2.4mm  
7.0mm  
Mating Life Cycle: 500 cycles  
Outer Conductor: Passivated Stainless Steel  
Dielectric: PEI  
Inner Conductor: Gold Plated Beryllium Copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

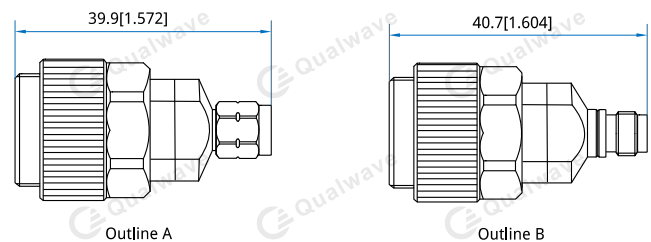

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

**QA2J-M** - 2.4mm(m) to 7.0mm, Outline A

**QA2J-F** - 2.4mm(f) to 7.0mm, Outline B

Customization is available upon request.