

QA3N

3.5mm to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: 3.5mm
N
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

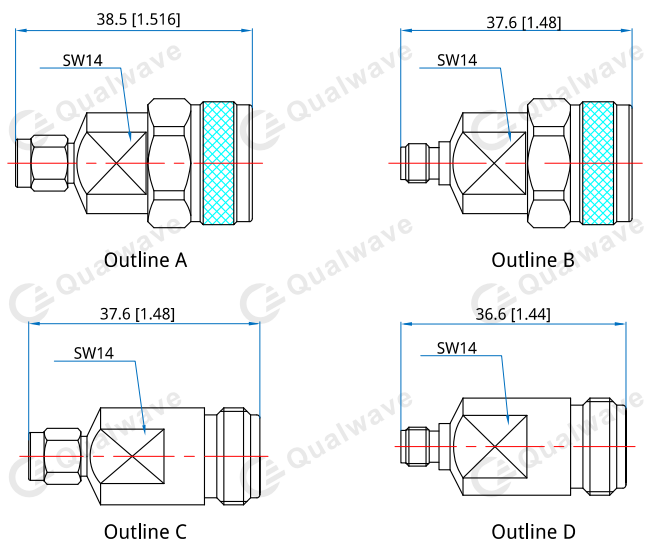

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QA3N-MM - 3.5mm (m) to N (m), Outline A

QA3N-FM - 3.5mm (f) to N (m), Outline B

QA3N-MF - 3.5mm (m) to N (f), Outline C

QA3N-FF - 3.5mm (f) to N (f), Outline D

Customization is available upon request.