

QA3S

3.5mm to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~27GHz
VSWR: 1.15 max.
Impedance: 50Ω

Mechanical

RF Connectors: 3.5mm
SMA
Outer Conductor: Polished & passivated SU303F
stainless steel
Dielectric: PEI or PTFE
Inner Conductor: Gold plated beryllium copper

How To Order

QA3S-MM - 3.5mm (m) to SMA (m), Outline A


QA3S-FF - 3.5mm (f) to SMA (f), Outline B

QA3S-MF - 3.5mm (m) to SMA (f), Outline C

QA3S-FM - 3.5mm (f) to SMA (m), Outline D

Customization is available upon request.

Outline Drawings

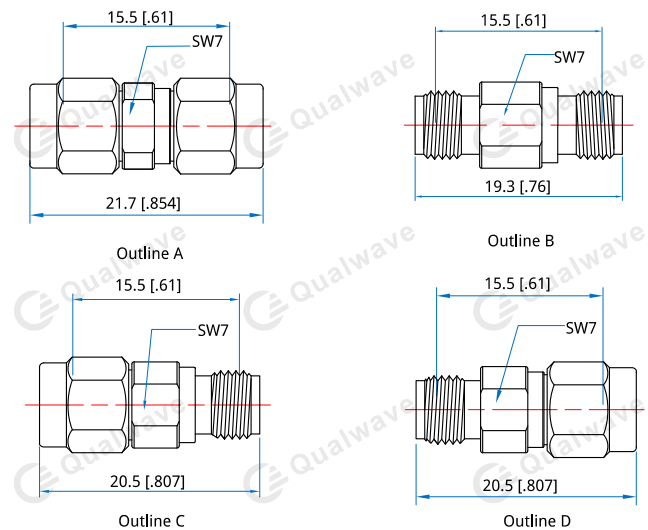

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]