

# QABZ

## BNC to UHF

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~3GHz  
Impedance: 50Ω

### Mechanical

RF Connectors: BNC  
UHF  
Mating Life Cycle: 500 cycles  
Outer Conductor: Nickel Plated Brass  
Dielectric: PTFE  
Inner Conductor: Gold Plated Beryllium Copper

### Environmental

Temperature: -55~+165°C

### How To Order

**QABZ-MM** - BNC(m) to UHF(m), Outline A


**QABZ-FF** - BNC(f) to UHF(f), Outline B

**QABZ-MF** - BNC(m) to UHF(f), Outline C

**QABZ-FM** - BNC(f) to UHF(m), Outline D

Customization is available upon request.

### Outline Drawings

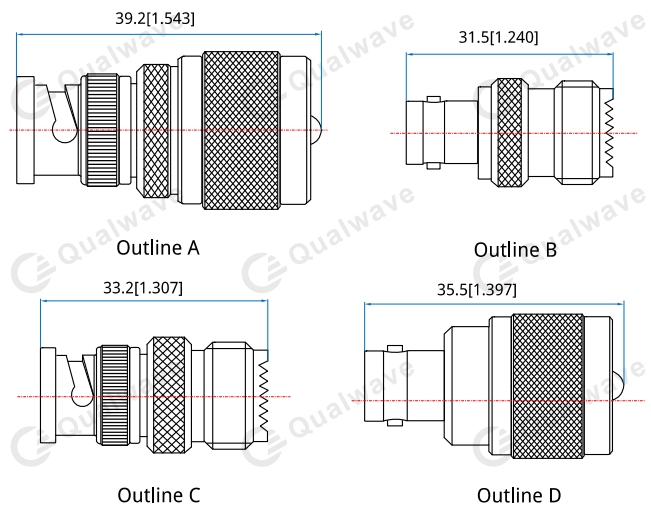

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]