

QAEE

SC to SC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~11GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: SC
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

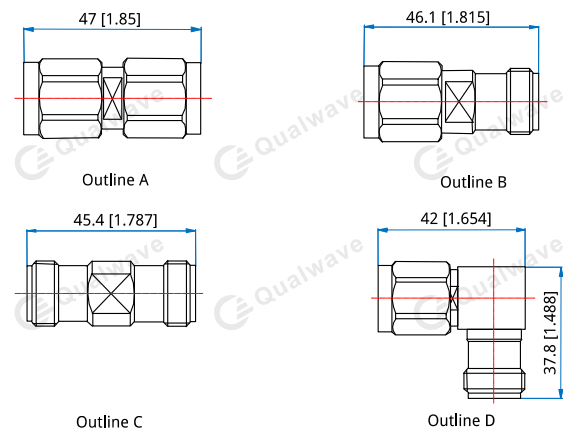

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QAEE-MM - SC(m) to SC(m), Outline A

QAEE-MF - SC(m) to SC(f), Outline B

QAEE-FF - SC(f) to SC(f), Outline C

QAEE-RF - SC(m) to SC(f), Right angle, Outline D

Customization is available upon request.