

# QAFF

## F to F

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~1GHz  
VSWR: 1.3 max.  
Impedance: 75Ω


### Mechanical

RF Connectors: F  
Mating Life Cycle: 500 cycles  
Outer Conductor: Nickel plated brass  
Dielectric: PTFE  
Inner Conductor: Gold Plated Beryllium Copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

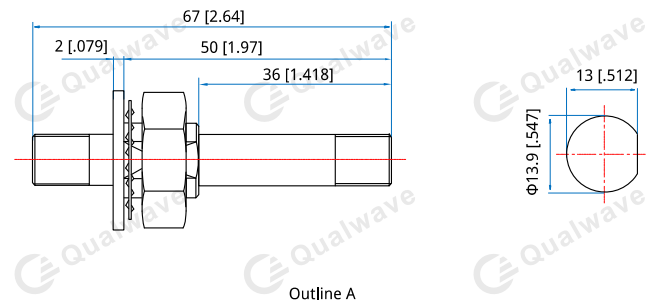

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

**QAFFH-FF** - F(f) to F(f), Bulk head, Outline A

Customization is available upon request.