

# QAM2K

## NMD 2.4mm to 2.92mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~40GHz  
VSWR: 1.2 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: NMD 2.4mm  
2.92mm  
Mating Life Cycle: 500 cycles  
Outer Conductor: Passivated stainless steel  
Dielectric: PEI  
Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

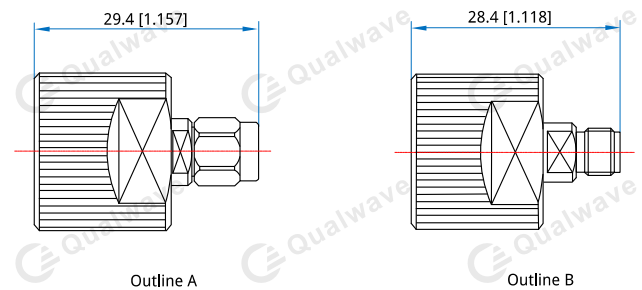

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

**QAM2K-FM** - NMD 2.4mm(f) to 2.92mm(m), Outline A

**QAM2K-FF** - NMD 2.4mm(f) to 2.92mm(f), Outline B

Customization is available upon request.