

QAMM

MCX to MCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~6GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: MCX
Mating Life Cycle: 500 cycles
Outer Conductor: Gold Plated Brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

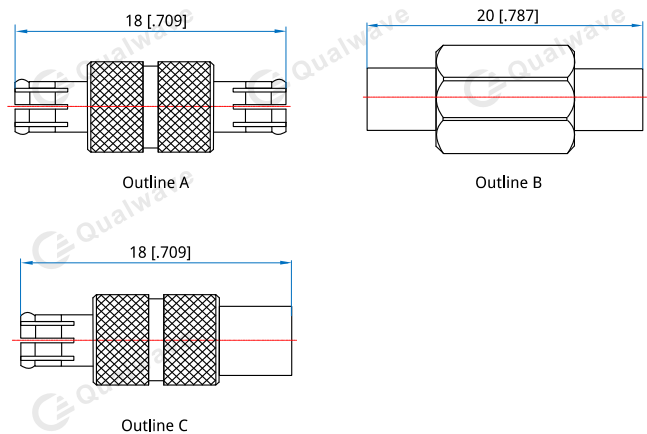

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QAMM-MM - MCX(m) to MCX(m), Outline A

QAMM-FF - MCX(f) to MCX(f), Outline B

QAMM-MF - MCX(m) to MCX(f), Outline c

Customization is available upon request.