

QAMV2

NMD 1.85mm to 2.4mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~50GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: NMD 1.85mm
2.4mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

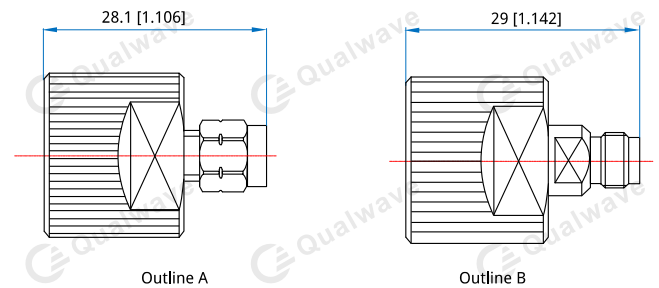

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QAMV2-FM - NMD 1.85mm(f) to 2.4mm(m), Outline A

QAMV2-FF - NMD 1.85mm(f) to 2.4mm(f), Outline B

Customization is available upon request.