

# QANNEX

## N to NEX10

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~6GHz  
VSWR: 1.1 max.(DC~3GHz)  
Impedance: 50Ω

### Mechanical

RF Connectors: N  
NEX10  
Outer Conductor: Ternary alloy plated brass  
Dielectric: PTFE  
Inner Conductor: Silver plated beryllium copper

### Environmental


Temperature: -55~+85°C

### How To Order

**QANNEX-MF** - N(m) to NEX10(f), Outline A

Customization is available upon request.

### Outline Drawings

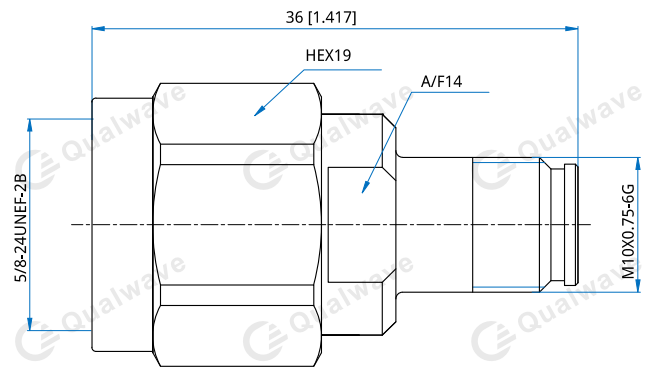

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]