

QAS4

SMA to 4.3/10

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~6GHz
VSWR: 1.15 max. @DC~3GHz
Impedance: 50Ω

Mechanical


RF Connectors: SMA
4.3/10
Outer Conductor: Silver plated phosphor bronze
Dielectric: PTFE
Inner Conductor: Silver plated phosphor bronze
Silver plated brass/beryllium copper

How To Order

QAS4-MM - SMA(m) to 4.3-10(m), Outline A
QAS4-MF - SMA(m) to 4.3-10(f), Outline B
QAS4-FM - SMA(f) to 4.3-10(m), Outline C
QAS4-FF - SMA(f) to 4.3-10(f), Outline D

Customization is available upon request.

Outline Drawings

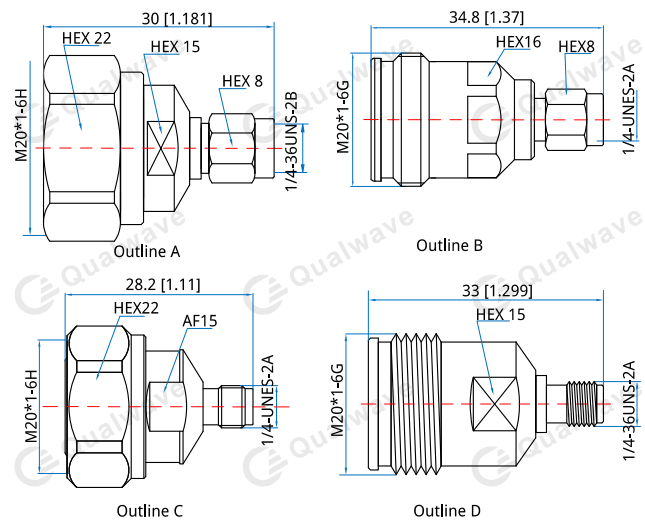

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]