

QASI SMA to BMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
1.35 max. (Outline E, F, G)
Impedance: 50Ω

Mechanical

RF Connectors: SMA
BMA
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PTFE
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

How To Order

QASI-MM - SMA(m) to BMA(m), Outline A

QASI-MF - SMA(m) to BMA(f), Outline B

QASI-FM - SMA(f) to BMA(m), Outline C

QASI-FF - SMA(f) to BMA(f), Outline D


QASIL-FF - SMA(f) to BMA(f), Flange mount, Outline E

QASIL-FF-1 - SMA(f) to BMA(f), Flange mount, Outline F

QASIL-FF-2 - SMA(f) to BMA(f), Flange mount, Outline G

Customization is available upon request.

Outline Drawings

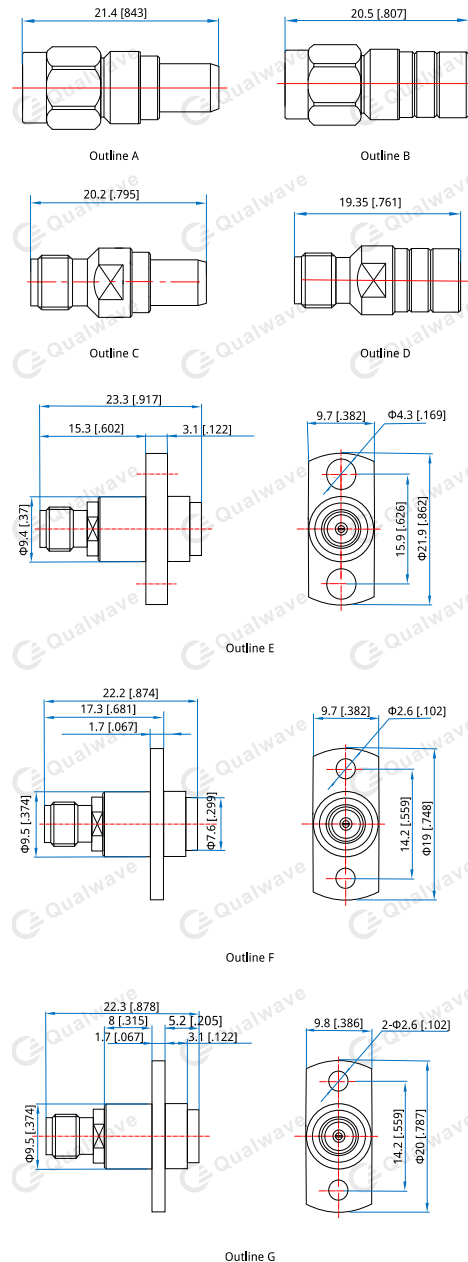

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]