

QASM

SMA to MCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC-6GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
MCX
Mating Life Cycle: 500 cycles
Outer Conductor: Gold Plated Brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

How To Order

QASM-MM - SMA(m) to MCX(m), Outline A

QASM-MF - SMA(m) to MCX(f), Outline B


QASM-FM - SMA(f) to MCX(m), Outline C

QASM-FF - SMA(f) to MCX(f), Outline D

QASM-FF-1 - SMA(f) to MCX(f), Outline E

Customization is available upon request.

Outline Drawings

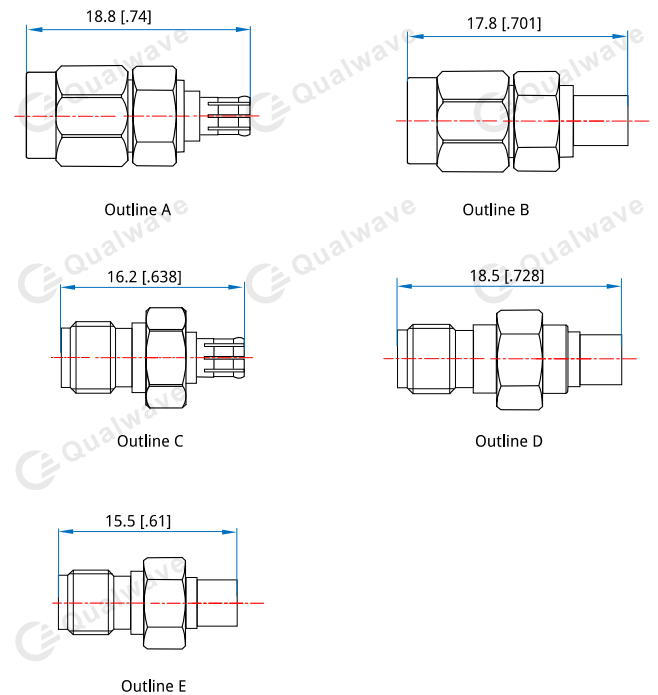

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]