

QASQ-B

SMA to QMA, DC~6GHz

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency: DC~6GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
QMA
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold plated phosphor bronze

Outline Drawings

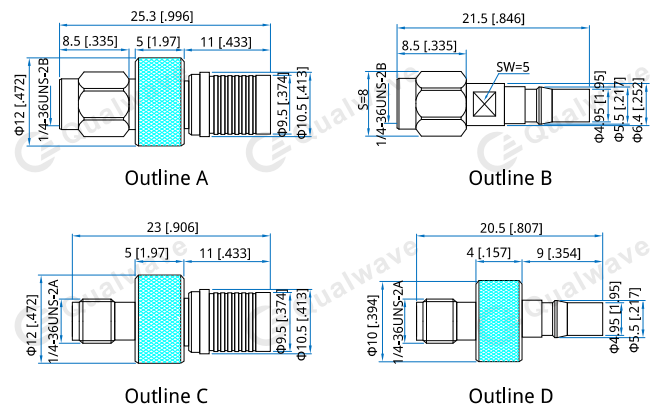

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QASQ-MM-B - SMA (m) to QMA (m), Outline A

QASQ-MF-B - SMA (m) to QMA (f), Outline B

QASQ-FM-B - SMA (f) to QMA (m), Outline C

QASQ-FF-B - SMA (f) to QMA (f), Outline D

Customization is available upon request.