

QASQS

SMA to Quick SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
Quick SMA
Mating Life Cycle: 500 cycles
Outer Conductor: Gold plated brass or passivated stainless steel
Dielectric: PTFE
Inner Conductor: Gold plated beryllium copper or Gold plated brass

Outline Drawings

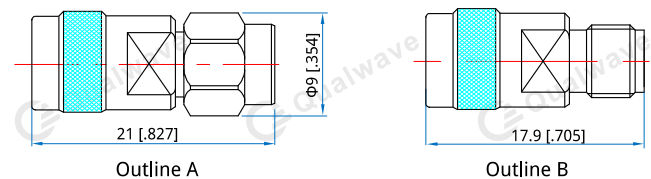

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QASQS-MM - SMA (m) to Quick SMA (m), Outline A

QASQS-FM - SMA (f) to Quick SMA (m), Outline B

Customization is available upon request.