

QASS SMA to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~26.5GHz
DC~18GHz (right angle, bulk head, reversed polarity)
VSWR: 1.3 max.
Impedance: 50Ω


Mechanical

RF Connectors: SMA
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel or Gold plated brass
Dielectric: PEI or PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+85°C

Outline Drawings

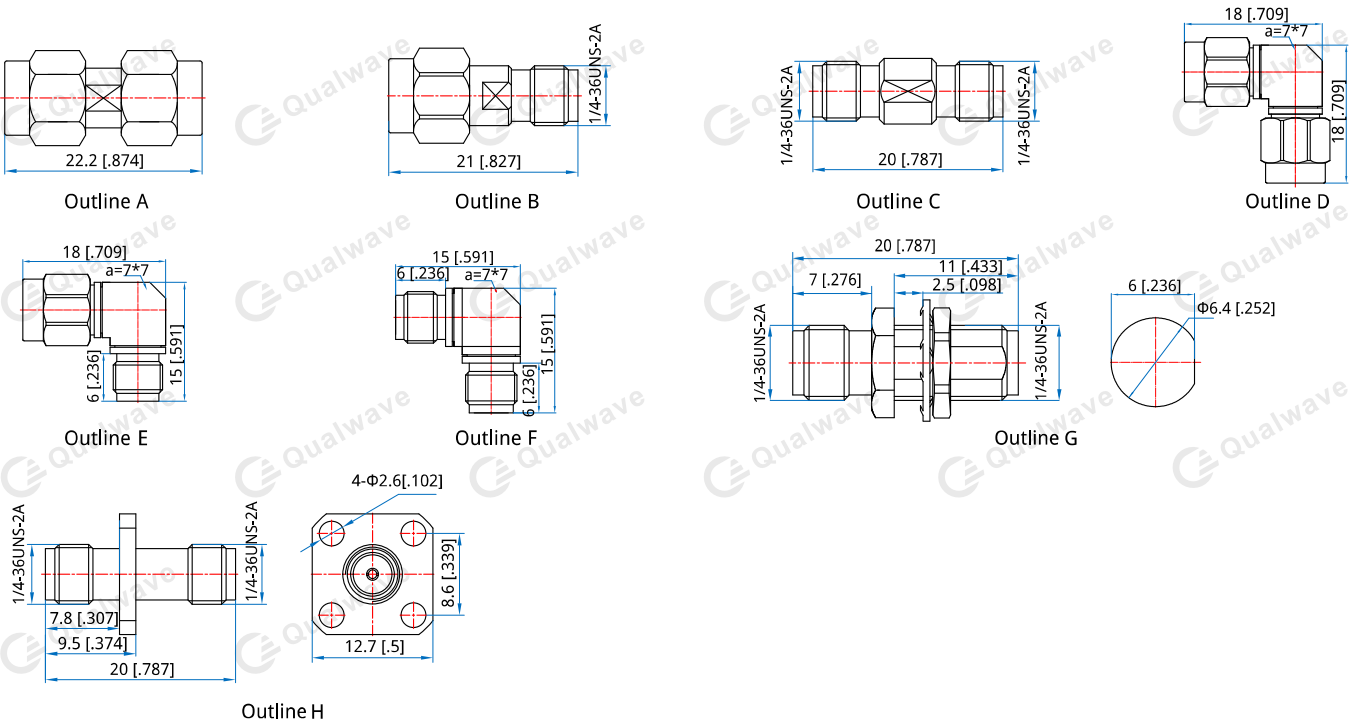

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QASS-MM - SMA(m) to SMA(m), Outline A

QASS-MF - SMA(m) to SMA(f), Outline B

QASS-FF - SMA(f) to SMA(f), Outline C

QASSR-MM - SMA(m) to SMA(m) right angle, Outline D

QASSR-MF - SMA(m) to SMA(f) right angle, Outline E

QASSR-FF - SMA(f) to SMA(f) right angle, Outline F

QASSH-FF - SMA(f) to SMA(f) bulk head, Outline G

QASSL-FF - SMA(f) to SMA(f) flange mount, Outline H

QASS-MRPM - SMA(m) reversed polarity to SMA(m), Outline A

QASS-MRPMRP - SMA(m) reversed polarity to reversed polarity SMA(m), Outline A

QASS-MRPF - SMA(m) reversed polarity to SMA(f), Outline B

QASS-MFRP - SMA(m) to SMA(f) reversed polarity, Outline B

QASS-MRPFPRP - SMA(m) reversed polarity to SMA(f) reversed polarity, Outline B

QASS-FRPF - SMA(f) reversed polarity to SMA(f), Outline C

QASS-FRPFPRP - SMA(f) reversed polarity to SMA(f) reversed polarity, Outline C

Customization is available upon request