

QASX

SMA to MMCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~6GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: SMA
MMCX
Mating Life Cycle: 500 cycles
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

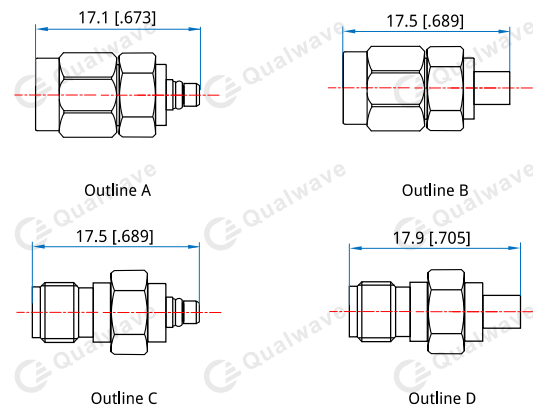

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QASX-MM - SMA(m) to MMCX(m), Outline A

QASX-MF - SMA(m) to MMCX(f), Outline B

QASX-FM - SMA(f) to MMCX(m), Outline C

QASX-FF - SMA(f) to MMCX(f), Outline D

Customization is available upon request.