

QAVG

1.85mm to SSMP

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~67GHz
VSWR: 1.3 max.
Impedance: 50Ω


Mechanical

RF Connectors: 1.85mm
SSMP
Mating Life Cycle: 100 cycles
Outer Conductor: Passivated Stainless Steel
&Gold Plated Beryllium Copper
or Passivated Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+125°C

Outline Drawings

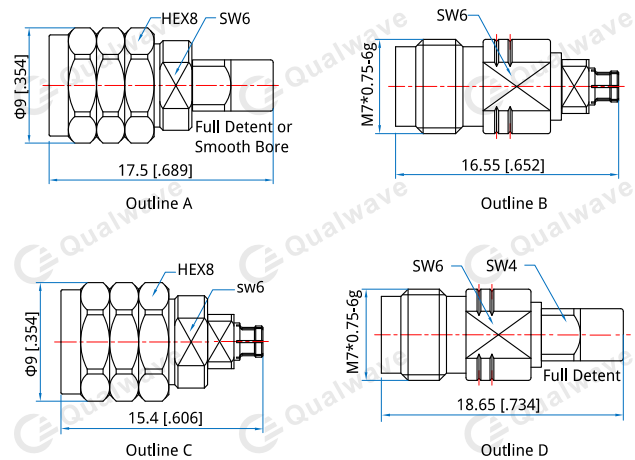

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- QAVG-MM** - 1.85mm(m) to SSMP(m), Outline A
- QAVG-FF** - 1.85mm(f) to SSMP(f), Outline B
- QAVG-MF** - 1.85mm(m) to SSMP(f), Outline c
- QAVG-FM** - 1.85mm(f) to SSMP(m), Outline D

Customization is available upon request.