

QAVV 1.85mm to 1.85mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~67GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: 1.85mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI or PTFE
Inner Conductor: Gold Plated Beryllium Copper or gold plated brass

How To Order


QAVV-MM - 1.85mm(m) to 1.85mm(m), Outline A
QAVV-MF - 1.85mm(m) to 1.85mm(f), Outline B
QAVV-FF - 1.85mm(f) to 1.85mm(f), Outline C
QAVVR-MM - 1.85mm(m) to 1.85mm(m), right angle, Outline D
QAVVR-MF - 1.85mm(m) to 1.85mm(f), right angle, Outline E
QAVVR-FF - 1.85mm(f) to 1.85mm(f), right angle, Outline F
QAVWL-FF - 1.85mm(f) to 1.85mm(f), flange mount, Outline G
QAVWH-FF - 1.85mm(f) to 1.85mm(f), bulk head, Outline H

Customization is available upon request.

Environmental

Temperature: -55~+125°C

Outline Drawings

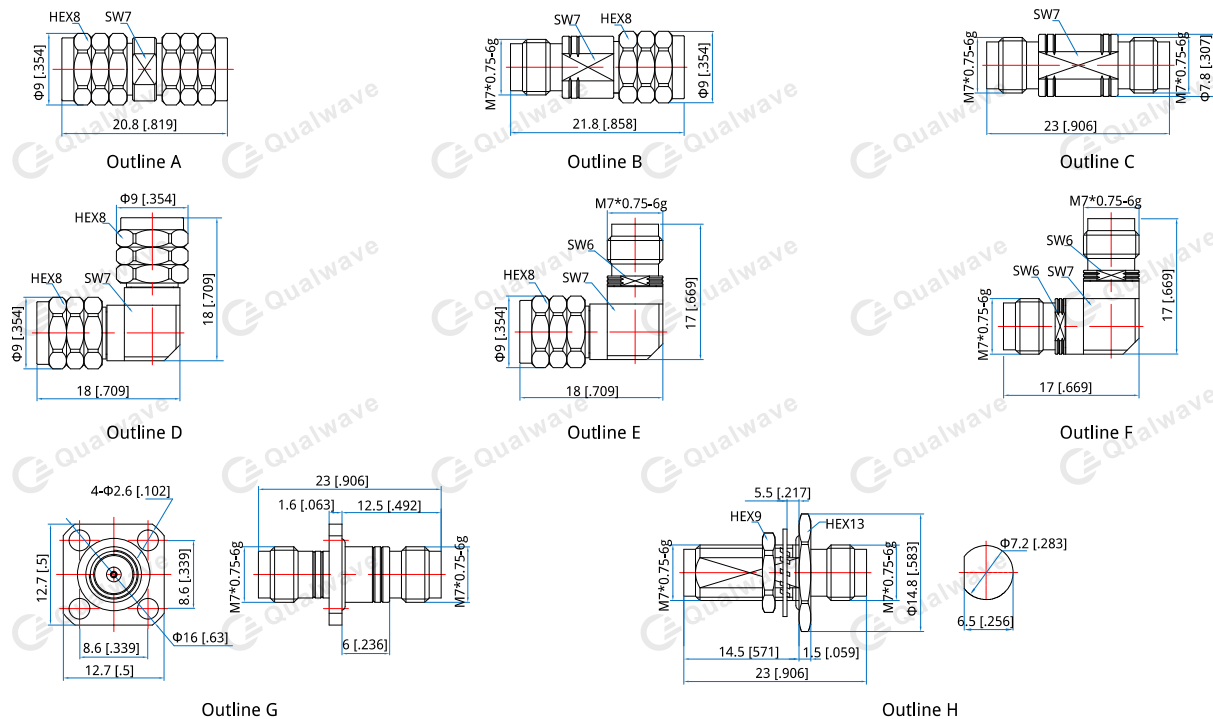

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]