

QCC1319C

High Power, High Isolation

Features:
 * High Power
 * High Isolation
 * Low Insertion Loss
 * Low VSWR

Applications:
 * Wireless
 * Radar
 * Laboratory Test


Description

QCC1319C series Coaxial Circulators cover frequency range 7~13GHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power (W)	Connector	Temperature (°C)
7000~9000	2000	0.40	20.0	1.25	30 max.	SMA	-30~+75
7000~13000	6000	0.70	14.0	1.60	30 max.	SMA	0~+60
8000~12000	4000	0.50	18.0	1.30	30 max.	SMA	-10~+60
9000~10200	1200	0.40	20.0	1.25	30 max.	SMA	-10~+60
9100~9700	600	0.40	20.0	1.25	30 max.	SMA	-30~+75
10000~11000	1000	0.30	23.0	1.20	30 max.	SMA	-10~+60
10700~12700	2000	0.40	20.0	1.20	30 max.	SMA	-10~+60

Outline Drawings

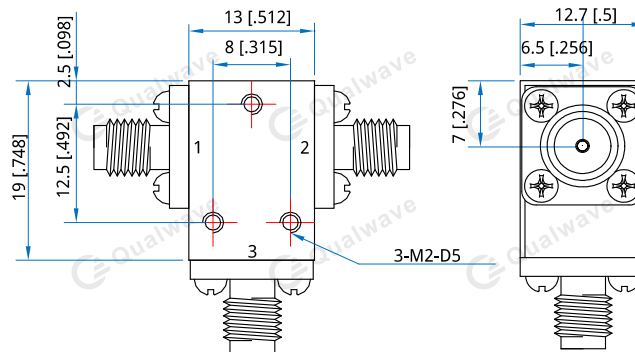

Unit: mm [inch] Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*1: 13*19*12.7mm
 0.512*0.748*0.5in
 Mounting: 3-M2, depth 5mm

[1] Exclude connectors

Connector Naming Rules:

S - SMA Female

Direction Naming Rules:

1 - Clockwise
 2 - Anticlockwise

How To Order

QCC1319C-V-W-X-Y-Z

V: Start frequency in MHz
 W: Stop frequency in MHz
 X: Average power in W
 Y: Connector type
 Z: Direction type

Examples:

To order a QCC1319C series Circulator, 8~12GHz, 30W, SMA female, Clockwise, specify QCC1319C-8000-12000-30-S-1. Customization is available upon request.