



QCI-26500-40000-10-1-K

26.5~40GHz

Features: Applications:

* Broadband * Wireless

* High Power * Radar

* Low Insertion Loss * Laboratory Test

Electrical

Frequency: 26.5~40GHz
Insertion Loss: 1.7dB max.
Isolation: 12dB min.

 $\begin{array}{ccc} & VSWR: & 1.8 \ max. \\ Forward \ Power: & 10W \ max. \\ Reverse \ Power: & 1W \ max. \\ & Impedance: & 50\Omega \end{array}$

Mechanical

Size*1: 13*26*22mm

0.512*1.024*0.866in

RF Connectors: 2.92mm female Mounting: 3-M2.5mm


tapped-through-hole

[1] Exclude connectors and termination.

Environmental

Operating Temperature: -45~+85°C Non-operating Temperature: -55~+105°C

Outline Drawings

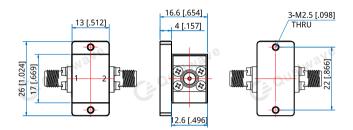

Unit: mm [in]

Tolerance: ±0.25mm [±0.01in]

How To Order

QCI-26500-40000-10-1-K

Customization is available upon request.