

## QCI-26500-40000-5-1-K-1

26.5~40GHz, 5W/1W, 2.92mm Female, Clockwise

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

Frequency:	26.5~40GHz
Insertion Loss:	1.3dB max.
Isolation:	12dB min.
VSWR:	1.7 max.
Forward Power:	5W
Reverse Power:	1W
Impedance:	50Ω

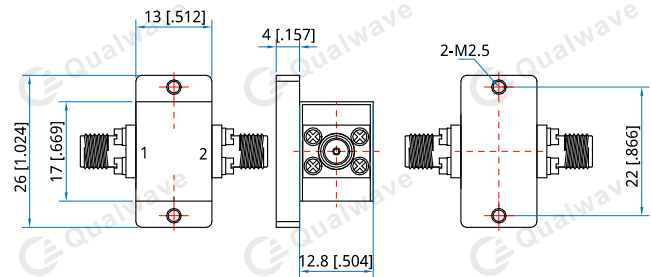
**Mechanical**

Size <sup>*1</sup> :	26*13*16.8mm 1.024*0.512*0.661in
RF Connectors:	2.92mm female
Mounting:	2-M2.5 through-hole
Direction:	Clockwise

[1] Exclude connectors and termination.

**Environmental**

Operating Temperature:	-30~+70°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.25mm [±0.01in]

**How To Order**

**QCI-26500-40000-5-1-K-1**

Customization is available upon request.