

QCI2123B

High Power, High Isolation

Features:
 * High Power
 * High Isolation
 * Low Insertion Loss
 * Low VSWR

Applications:
 * Wireless
 * Radar
 * Laboratory Test


Description

QCI2123B series Coaxial Isolators cover frequency range 4000~8000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Connector	Temperature (°C)
4000~8000	4000	0.60	18.0	1.35	60	20	SMA	0~+60
5800~6800	1000	0.50	19.0	1.30	60	20	SMA	0~+60
6000~8000	2000	0.40	18.0	1.30	60	20	SMA	0~+60

Outline Drawings

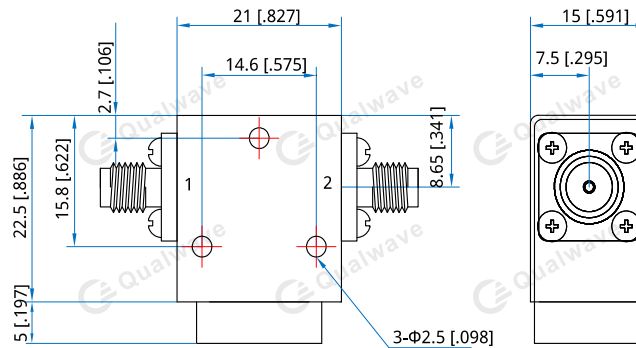

Unit: mm [inch] Tolerance: ±0.2mm [±0.008in]

Mechanical

Size^{*1}: 21*22.5*15mm
 0.827*0.886*0.591in

Mounting: 3-Φ2.5mm through-hole

[1] Exclude connectors and terminations.

Connector Naming Rules:

S - SMA Female

Direction Naming Rules:

1 - Clockwise
 2 - Anticlockwise

How To Order

QCI2123B-U-V-W-X-Y-Z

U: Start frequency in MHz

V: Stop frequency in MHz

W: Forward power in W

X: Reverse power in W

Y: Connector type

Z: Direction type

Examples:

To order a QCI2123B series Isolator, 4000~8000MHz, Forward power 60W, Reverse power 20W, SMA female, Clockwise, specify QCI2123B-4000-8000-60-20-S-1.

Customization is available upon request.