

QCT0602

DC~6GHz, 2W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency Range: DC~6GHz
 Average Power^{*1}: 2W@25°C
 VSWR: 1.25 max.
 Impedance: 50Ω

[1] Derated linearly to 0.2W@125°C.


Mechanical

RF Connectors: MCX Male

Environmental

Temperature: -55~+125°C

Outline Drawings

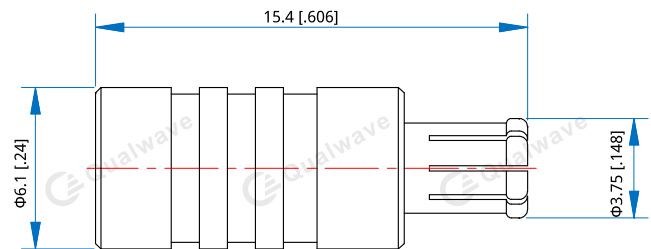

Unit: mm [in]

Tolerance: ±3%

How To Order

QCT0602-X-Y

X: Frequency in GHz

Y: Connector type

Connector naming rules:

M - MCX Male (Outline A)

Examples:

To order an termination, DC-6GHz, MCX male, specify QCT0602-6-M.

Customization is available upon request.