

QDB-10-18000

10MHz~18GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range:	0.01~18GHz
Insertion Loss:	0.6dB max.
VSWR:	1.25 max.
Impedance:	50Ω
Voltage:	50V max.


Mechanical

Connectors:	N
Mating Life Cycle:	500 cycles
Outer Conductors:	Passivated SUS303 Stainless Steel
Dielectric:	PEI
Inner Conductors:	Gold Plated Beryllium Copper

Environmental


Operating Temperature:	-55~+165°C
------------------------	------------

Outline Drawings

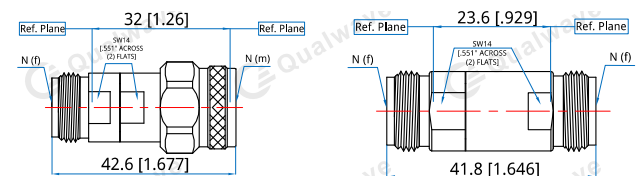

Outline A

Outline B



Outline C

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDB-10-18000-NNF - Outline A

QDB-10-18000-NFNF - Outline B

QDB-10-18000-NN - Outline C

Customization is available upon request.