

QDB-80-3000-3K-NNF

0.08~3GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range:	0.08~3GHz
Insertion Loss:	0.25dB max.
VSWR:	1.15 max.
IP3 (900MHz):	-130dBc@2×43dBm (Outline A) -160dBc@2×43dBm (Outline B)
Impedance:	50Ω
Voltage:	3000V max.


Mechanical

Connectors:	N male N female
Outer Conductors:	Ternary alloy plated brass
Female Inner Conductors:	Silver Plated Beryllium Copper
Male Inner Conductors:	Silver Plated Brass

Environmental

Operating Temperature:	-45~+55°C
------------------------	-----------

Outline Drawings

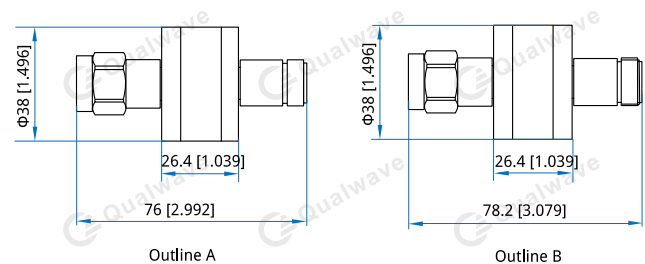

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDB-80-3000-3K-NNF-A - Outline A

QDB-80-3000-3K-NNF-B - Outline B

Customization is available upon request.