

QDA-10-18000-63-1

0.01~18GHz, 63dB, 1dB

Features:
 * Broadband
 * High Dynamic Range

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.01~18GHz
Insertion Loss:	7.5dB max.
Attenuation Flatness:	±0.4dB typ. @1~10dB ±0.8dB typ. @10.25~30dB ±1.5dB typ. @30.25~63dB
Step:	1dB
Attenuation Range:	0~63dB
Attenuation Accuracy:	±0.4dB typ. @1~10dB ±0.8dB typ. @10.25~30dB ±1.5dB typ. @30.25~63dB
Switching Time:	20ns typ.
VSWR:	2 max.
Voltage/Current:	-5V @15mA typ.
Input Power:	+25dBm max.

Mechanical

Size*1:	32*20*12.7mm 1.26*0.787*0.5in
RF Connectors:	SMA Female
Power Supply & Control Interface Connectors:	J30J-15ZKP
Mounting:	4-Φ2.7mm through-hole
Logic Input:	On: 1(+3~+5V) Off: 0(0~+0.5V)

[1] Exclude connectors.


Pin Numbering

Pin	Function	Pin	Function
1	-5V	7	C4:-8dB
2	GND	8	C5:-16dB
3	NC	9	C6:-32dB
4	C1:-1dB	10	NC
5	C2:-2dB	11~15	NC
6	C3:-4dB		

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

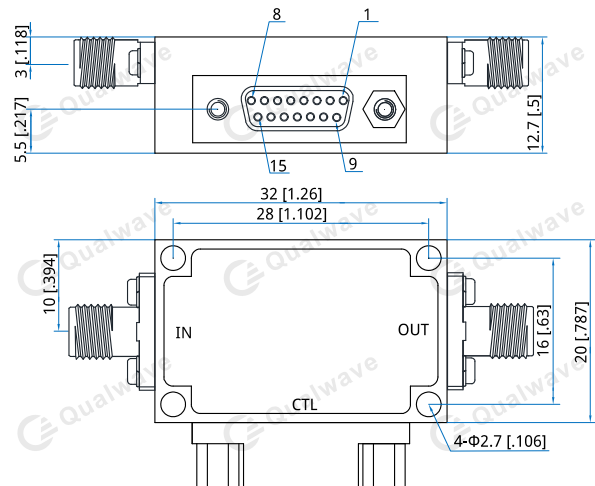

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

Logic Table

State	C1	C2	C3	C4	C5	C6	Attenuation State
-	0	0	0	0	0	0	Reference IL
1	1	0	0	0	0	0	1dB
2	0	1	0	0	0	0	2dB
3	0	0	1	0	0	0	4dB
4	0	0	0	1	0	0	8dB
5	0	0	0	0	1	0	16dB
6	0	0	0	0	0	1	32dB
7	1	1	1	1	1	1	63dB

How To Order

QDA-10-18000-63-1

Customization is available upon request.