

QDC1220D

High Power, High Isolation

Features:
 * High Power
 * High Isolation
 * Low Insertion Loss
 * Low VSWR

Applications:
 * Wireless
 * Radar
 * Laboratory Test


Description

QDC1220D series Drop-In Circulators cover frequency range 5~6.5GHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power (W)	Temperature (°C)
5100~5900	800	0.50	18.0	1.30	60	-30~+70
5150~5500	350	0.40	20.0	1.25	60	-30~+70
5230~5340	110	0.30	23.0	1.20	60	-30~+70
5400~5900	500	0.40	20.0	1.25	60	-30~+70
5700~5900	200	0.30	23.0	1.20	60	-30~+70
5780~6000	220	0.30	23.0	1.25	60	-30~+70
5800~6500	700	0.40	20.0	1.25	60	-30~+70
6500~7000	500	0.40	20.0	1.25	60	-30~+70

Outline Drawings

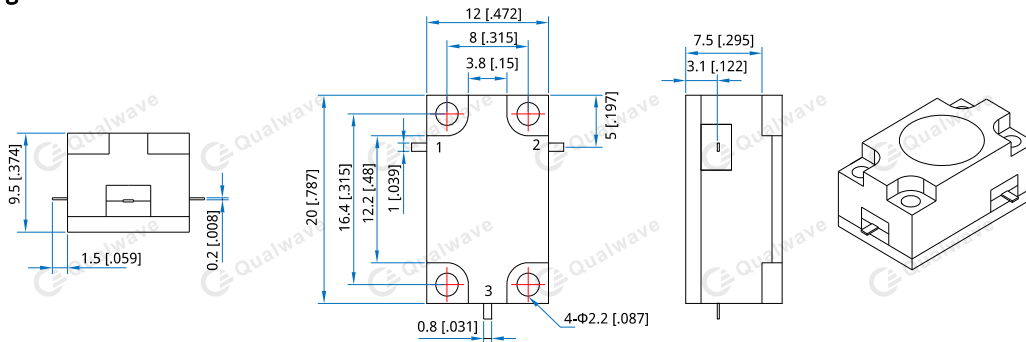

Unit: mm [inch] Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*1: 12*20*9.5mm
 0.472*0.787*0.374in
 Connector Type: Strip line
 Mounting: 4-Φ2.2mm through-hole

[1] Exclude connectors

How To Order

QDC1220D-W-X-Y-Z
 W: Start frequency in MHz
 X: Stop frequency in MHz
 Y: Average Power in W
 Z: Direction type

Examples:

To order a QDC1220D series Circulator, 5.7~6GHz, 50W, Clockwise, specify QDC1220D-5700-6000-50-1.

Customization is available upon request.