

QDDC-18000-26500-30-10-S

18~26.5GHz, 30W, 10dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

| | |
|------------------------|---------------|
| Frequency: | 18~26.5GHz |
| Insertion Loss: | 2.4dB max. |
| Coupling: | 10±1.5dB max. |
| Frequency Sensitivity: | ±1dB max. |
| Directivity: | 10dB min. |
| VSWR: | 1.6 max. |
| Average Power: | 30W |

Mechanical


| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 56*15*11mm 2.205*0.591*0.433in |
| Connectors: | SMA Female |
| Mounting: | 2-Φ2.3mm through hole |

[1] Exclude connectors

Environmental

| | |
|--------------|-----------|
| Temperature: | -40~+85°C |
|--------------|-----------|

Outline Drawings

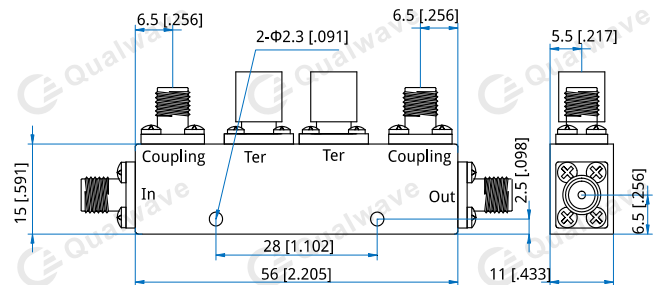

Unit: mm [in]

Tolerance: ±18mm [±0.012in]

How To Order

QDDC-18000-26500-30-10-S

Customization is available upon request.