

## QDDC-18000-67000-12-30-V

18~67GHz, 12W

Features:  
 \* Broadband  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency:	18~67GHz
Directivity:	7dB min.
Coupling Flatness:	±1.2dB max.
Impedance:	50Ω
Average Power:	12W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)
30±1.2	2.8	2

### Mechanical

Connectors: 1.85mm Female

### Environmental


Operation Temperature: -55~+85°C  
 Non-operation Temperature: -55~+100°C

### How To Order

**QDDC-18000-67000-12-30-V**

Customization is available upon request.

### Outline Drawings

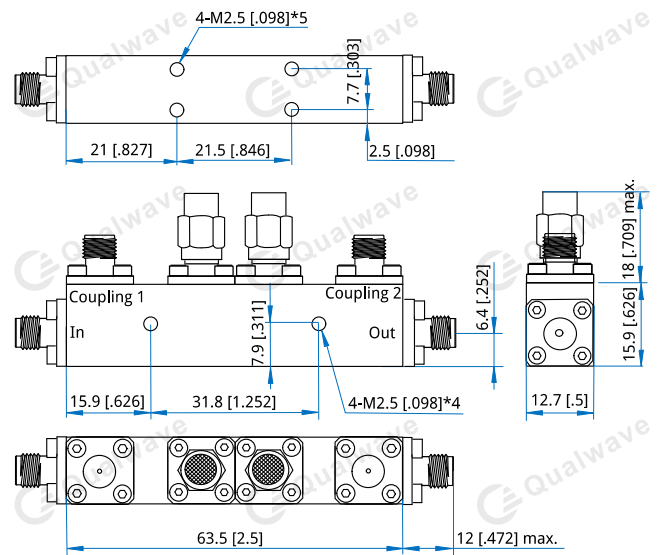

Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xx±0.1mm [±0.004in]