

QDDC-2-30-2K-50-NS

2~30MHz, 2000W, 50dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2~30MHz
Coupling:	50±1.5dB
Coupling Flatness:	±0.5dB max.
VSWR:	1.2 max.
Insertion Loss:	0.3dB max.
Directivity:	18dB min.
Average Power:	2000W CW

Mechanical


Size*1:	120*107*38mm 4.724*4.213*1.496in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ3mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

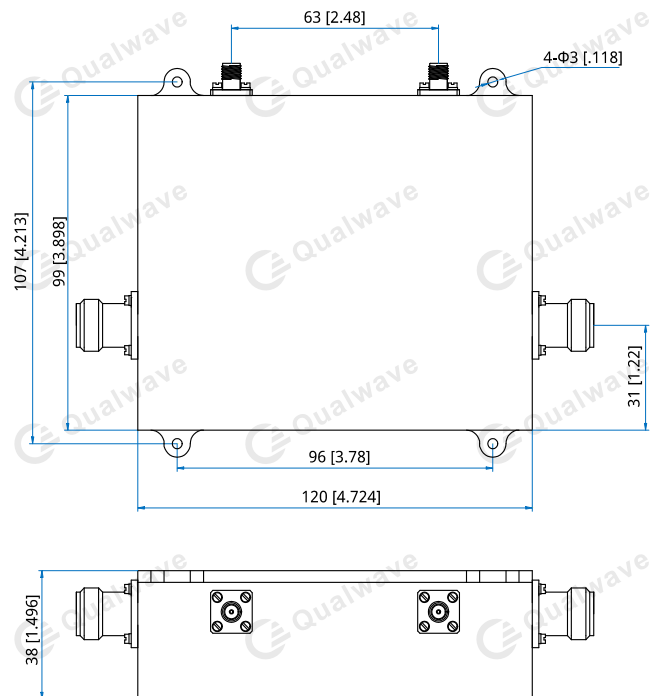

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-2-30-2K-50-NS

Customization is available upon request.