

QDDC-20-1000-K3-50-N

0.02~1GHz, 300W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.02~1GHz
Insertion Loss:	0.4dB max.
Coupling:	50±1dB
Directivity:	20dB min.
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.5 max.
Average Power:	300W

Mechanical


Size*1:	60*55*22mm 2.362*2.165*0.866in
Connectors:	N Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-45~+100°C
Non-operating Temperature:	-55~+100°C

Outline Drawings

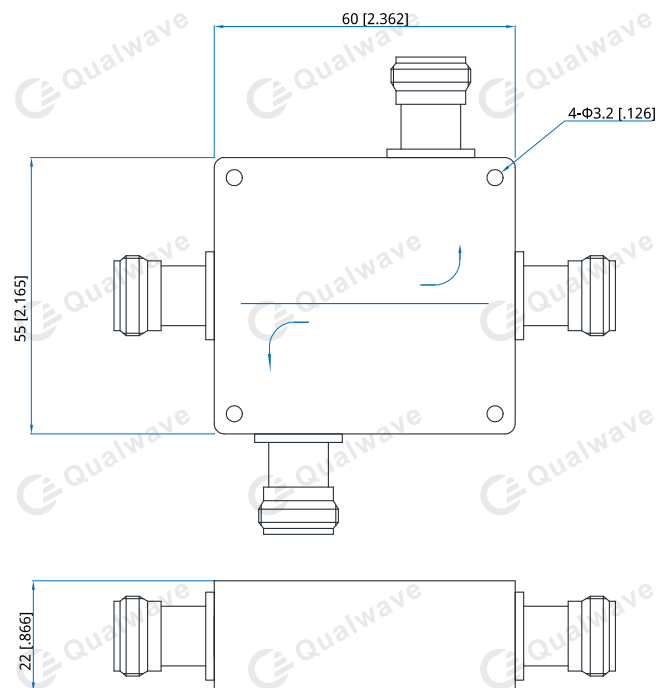

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-20-1000-K3-50-N

Customization is available upon request.