

QDDC-20-3000-20-20-S

0.02~3GHz, 20W, 20dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.02~3GHz
Coupling:	20±1.5dB
VSWR (Mainline):	1.5 max.
VSWR (Coupling):	1.8 max.
Insertion Loss:	1.3dB max.
Directivity:	15dB min.
Average Power:	20W max.

Mechanical


Size* ¹ :	51*50.8*22.35mm 2.008*2*0.88in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-45~+100°C
Non-operating Temperature:	-55~+100°C

Outline Drawings

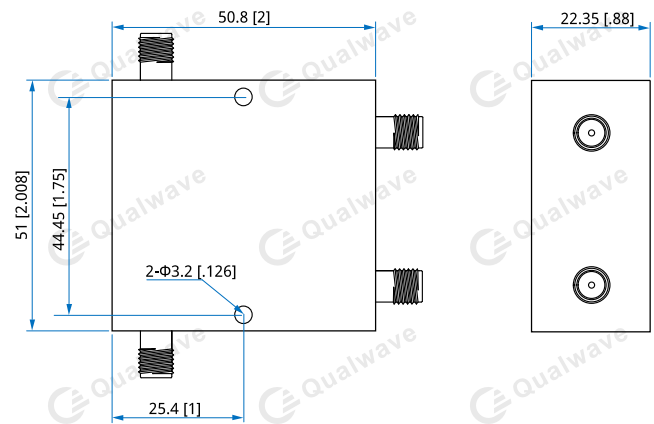

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-20-3000-20-20-S

Customization is available upon request.