

QDDC-2000-4000-K3-20-NS

2~4GHz, 300W, 20dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~4GHz
Coupling:	20±1dB
Coupling Flatness:	±0.8dB max.
VSWR(Mainline):	1.25 max.
VSWR(Coupling):	1.35 max.
Insertion Loss:	0.4dB max.
Directivity:	18dB min.
Average Power:	300W min.

Mechanical


Size ^{*1} :	44*26*22mm 1.732*1.024*0.866in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

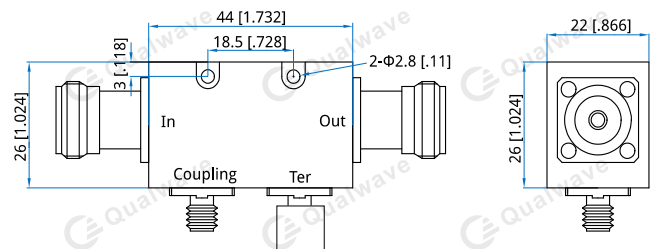

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-2000-4000-K3-20-NS

Customization is available upon request.