

QDDC-2000-4000-K5-40-N

2~4GHz, 500W, 40dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2~4GHz
Insertion Loss:	0.3dB max.
Coupling:	40±2dB
Directivity:	18dB min.
Coupling Flatness:	±1.5dB
VSWR (Mainline):	1.15 max.
Average Power:	500W
Impedance	50Ω

Mechanical


Size ^{*1} :	38.1*38.1*27.6mm 1.5*1.5*1.087in
Connectors:	N Female
Mounting:	4-Φ3.8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

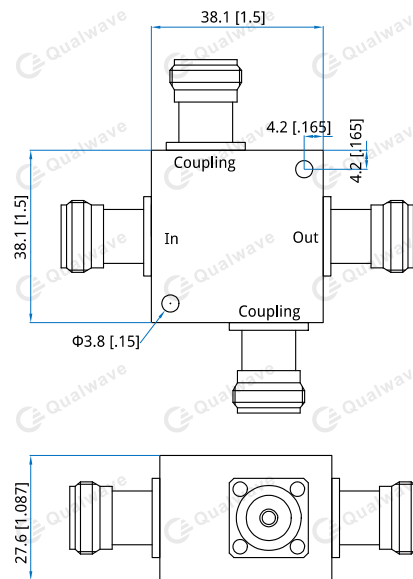

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QDDC-2000-4000-K5-40-N

Customization is available upon request.