

QDDC-2000-5000-K4-45-NS

2~5GHz, 400W, 45dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

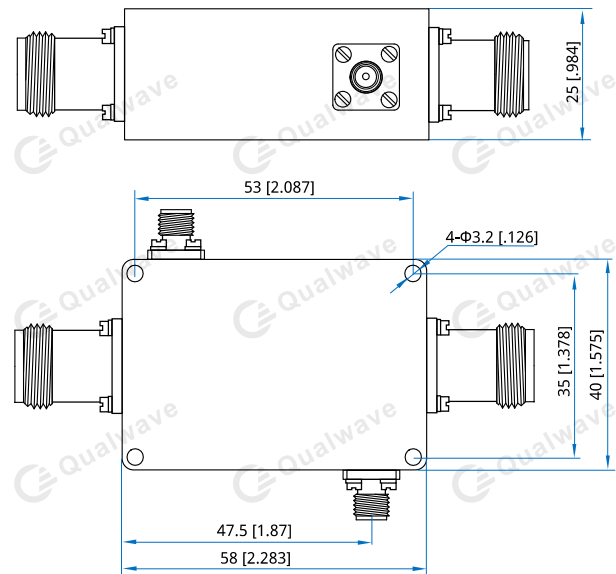
Electrical

Frequency:	2~5GHz
Coupling:	45±1.5dB
VSWR:	1.5 max.
Insertion Loss:	0.5dB max.
Directivity:	10dB min.
Average Power:	400W min.
Peak Power:	3000W

Mechanical

Size*1:	58*40*25mm 2.283*1.575*0.984in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-2000-5000-K4-45-NS

Customization is available upon request.